

Product Specification Sheet

UTS Field 35




- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

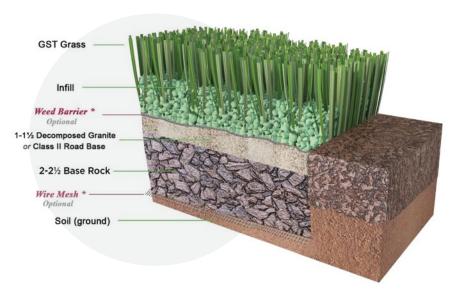



DIAMOND BLADE

SPECIFICATIONS

Pile Height: 3/4"

Turf Gauge: 3/8"

Face Weight: 35 oz./yd²

Backing Weight: 24 oz./yd2

Total Weight: **59 oz./yd**²

Stitch Rate: 15/10cm

Stitches/M2: 15750

Material/Dtex: PE9000 + PP4000

Color: Emerald Green and Olive Green with

Brown and Green Thatching

Type Of Fiber: **PE Monofilament and PP Curled**

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 8+ lb/force (ASTM D1335)

Blade Type: **Diamond Blade**

Permeability: 65.6 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >130 lb./force (ASTM D5034)

Grab Tear CMD: >110 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 200 ft

Sq. Ft. Per Roll: 3000

Total Roll Weight: 1266 lbs










121 INTERPARK BLVD, STE.1105, SAN ANTONIO, 78216 TELEPHONE: 726 -444 -0473

WWW.**ULTIMATETURFSOLUTIONS**.COM EMAIL: **DEVINV**@ULTIMATETURFSOLUTIONS.COM

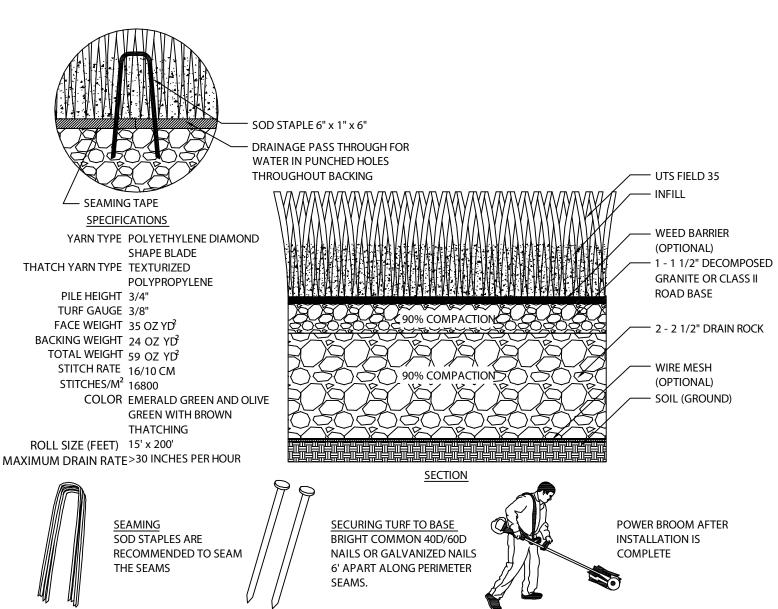

- 1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR GST RECOMMENDED SEAMING TECHNIQUES.
- 2. COLOR: EMERALD GREEN AND OLIVE GREEN WITH BROWN THATCHING.
- 3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 4. DO NOT SCALE DRAWING.
- 5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- 6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

