

ULTIMATE TURF SOLUTIONS

Product Specification Sheet



UTS Natural

USES


- ▶ Playgrounds
- ▶ Parks
- ▶ Soccer Field
- ▶ Football Field
- ▶ General Sports Fields
- ▶ Commercial or Residential
- ▶ Medium-Heavy Traffic



15 Year Manufacturer's Warranty
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

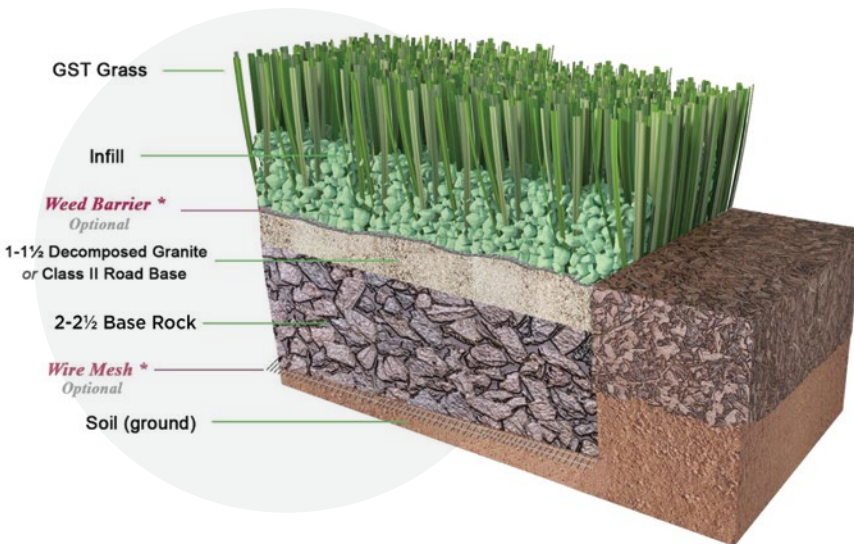

DIAMOND BLADE | DOUBLE S BLADE DOUBLE W BLADE

SPECIFICATIONS

Pile Height:	1.5"
Turf Gauge:	3/8"
Face Weight:	51 oz./yd ²
Backing Weight:	42 oz./yd ²
Total Weight:	93 oz./yd ²
Stitch Rate:	10/10cm
Stitches/M ² :	10500
Material/Dtex:	PE14000 + PP4500
Color:	Lime Green, Field Green, Light Brown and Emerald Green
Type Of Fiber:	PE Monofilament and PP Curled As Thatch
Infill Amount:	1.0 lb./psf.
Primary Backing:	Premium GST Backing
Tuft Bind:	19+ lb/force (ASTM D1335)
Blade Type:	Diamond Blade, Double S Blade, Double W Blade
Permeability:	35.4 inches/hr. (ASTM F1551)
Melting Point:	176 °F (ASTM D2859)
Grab Tear MD:	>300 lb./force (ASTM D5034)
Grab Tear CMD:	>200 lb./force (ASTM D5034)
Roll Width:	15 ft
Roll Length:	100 ft
Sq. Ft. Per Roll:	1500
Total Roll Weight:	948 lbs





ULTIMATE TURF SOLUTIONS


121 INTERPARK BLVD, STE.1105,

SAN ANTONIO, 78216

TELEPHONE: 726 -444 -0473

WWW.ULTIMATETURFSOLUTIONS.COM

EMAIL: DEVINV@ULTIMATETURFSOLUTIONS.COM



SOD STAPLE 6" x 1" x 6"

DRAINAGE PASS THROUGH FOR WATER IN PUNCHED HOLES THROUGHOUT BACKING

SEAMING TAPE SPECIFICATIONS

YARN TYPE POLYPROPYLENE CURLED

PILE HEIGHT 1.5"

TURF GAUGE 3/8"

FACE WEIGHT 51 OZ YD²

BACKING WEIGHT 42 OZ YD²

TOTAL WEIGHT 93 OZ YD²


STITCH RATE 10/10 CM

STITCHES/M² 10500


COLOR LIME GREEN, FIELD GREEN, LIGHT BROWN AND EMERALD

ROLL SIZE (FEET) 15' x 100'

MAXIMUM DRAIN RATE >35 INCHES PER HOUR

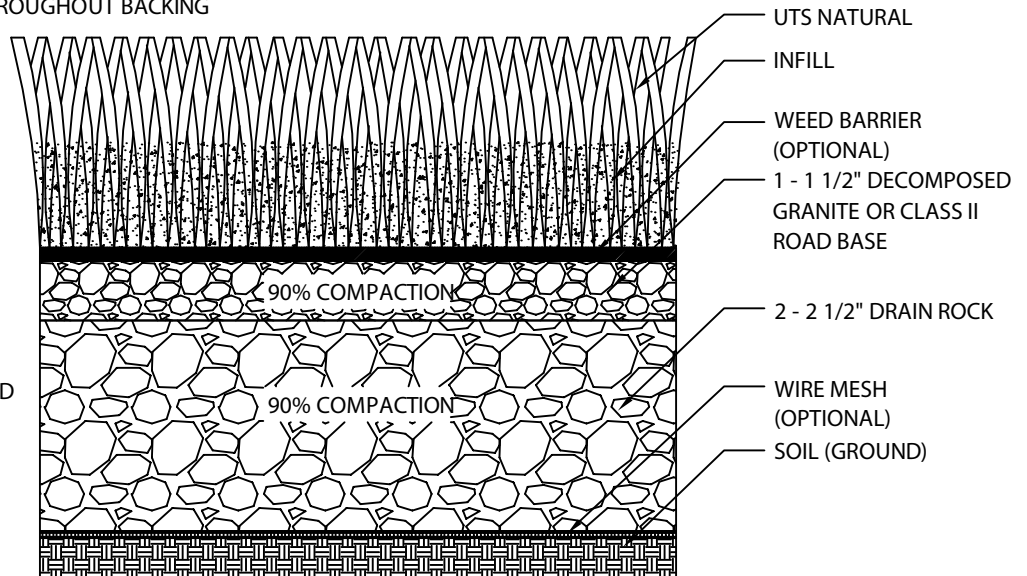

SECTION




SECURING TURF TO BASE

BRIGHT COMMON 40D/60D NAILS OR GALVANIZED NAILS 6' APART ALONG PERIMETER.

PUSH BROOM AFTER INSTALLATION IS COMPLETE.

NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR GST RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: LIME GREEN, FIELD GREEN, LIGHT BROWN AND EMERALD GREEN.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



UTS NATURAL

LANDSCAPING SYNTHETIC TURF INSTALLATION