


Product Specification Sheet

UTS Brack 46

- Putting Green
- Driving Ranges
- Bocce Ball
- Tennis Court
- Landscape
- Medium-Heavy Traffic

15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty

G Flo-Rite Drainage Technology

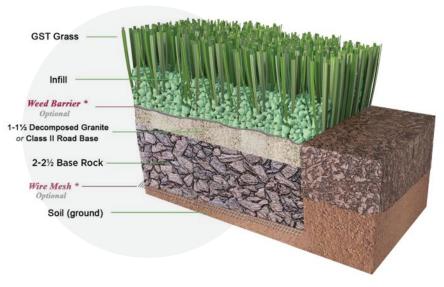


SPECIFICATIONS

Pile Height: 5/8"	
urf Gauge: 3/16	
ace Weight: 46 oz./yd ²	-
Backing Weight: 25 oz./yd ²	
ōtal Weight: 71 oz./yd ²	
Stitch Rate: 32/10cm	
Stitches/M ² : 67200	
Material/Dtex: PP5800	
Color: Light Bi-Color Green	
ype Of Fiber: PP Curled as thatch	
nfill Amount: 1.0 lb./psf.	
Primary Backing: Premium GST Backing	
uft Bind: 8+ Ib/force (ASTM D1335)	
Permeability: 26.1 inches/hr. (ASTM F1551)	
Melting Point: 176 °F (ASTM D2859)	
Grab Tear MD: >300 lb./force (ASTM D5034	•)
Grab Tear CMD: >200 lb./force (ASTM D503	34)
Roll Width: 15 ft	
Roll Length: 100 ft	
5q. Ft. Per Roll: 1500	

Total Roll Weight: 710 lbs



121 Interpark Blvd, Ste.1105, San Antonio, 78216, USA Telephone: **726 -444 -0473** | www.**ultimateturfsolutions**.com Email: **devinv**@ultimateturfsolutions.com

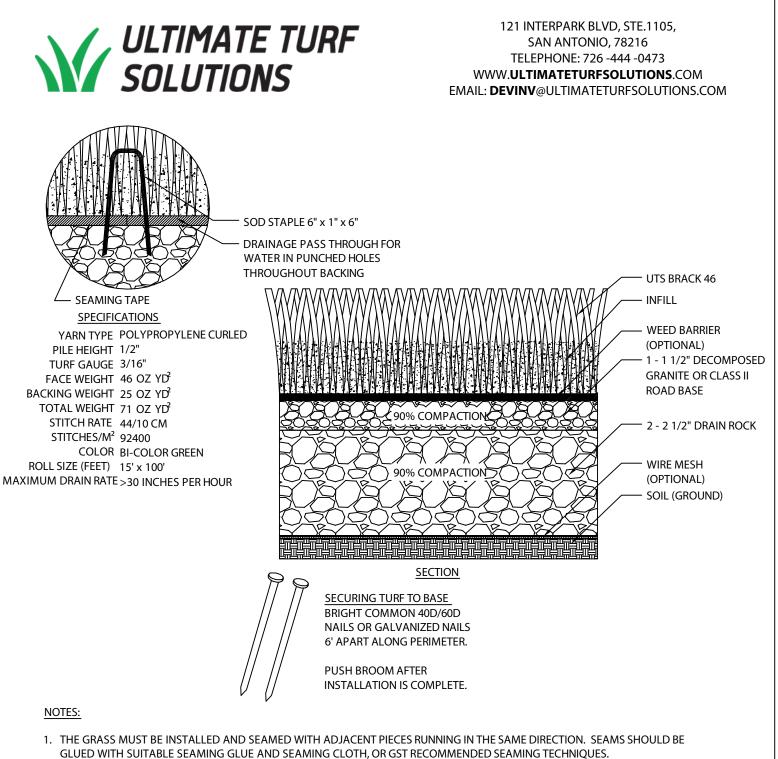

- 2. COLOR: BI-COLOR GREEN.
- 3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 4. DO NOT SCALE DRAWING.
- 5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- 6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

UTS BRACK 46